


# SUBMITTAL SHEET

# MODEL T4G

VISION-LITE  
GLASS FRAMES




This Product is Listed by  
**UNDERWRITERS LABORATORIES, INC.**  
and Bears the Mark:



- For use with 1 3/4" wood or metal doors.
- Uses 1/4" glass. NOTE: Use labeled wire glass only in UL listed installations (glass not included).
- Meets UL Positive Pressure requirements when installed in accordance with UL Specifications.
- Frame is 20 Gauge cold rolled steel.
- Lite kit uses size #6 screw.
- Rough opening size is 1 7/8" wider and higher than exposed glass.
- Actual glass size is 1" higher and wider than exposed glass.
- High style frame design for clean modern appearance.
- Low style interior fastening - no fasteners on exterior side.
- Frame clamps to door surface rather than fastened to door skin.
- Retention clips with one side access provided for one person installation.
- Slotted putty stop for ease of alignment.
- Minimum order size: 3" x 6".
- Maximum order size: 40" x 60".
- Maximum order size for UL approval: 22 1/2" x 54".

### Ordering:


1. Order size is exposed glass size.
2. Vision-Lites can be supplied in any specified size that does not exceed the minimum and maximum dimensions. However, best service and price available in two inch even increments.
3. Fractional sizes and odd sizes are available within minimum and maximum dimensions.

### Finish:

Gray                       Bronze  
 Beige                       AMS Beige

### Fasteners:

Security fasteners please specify:

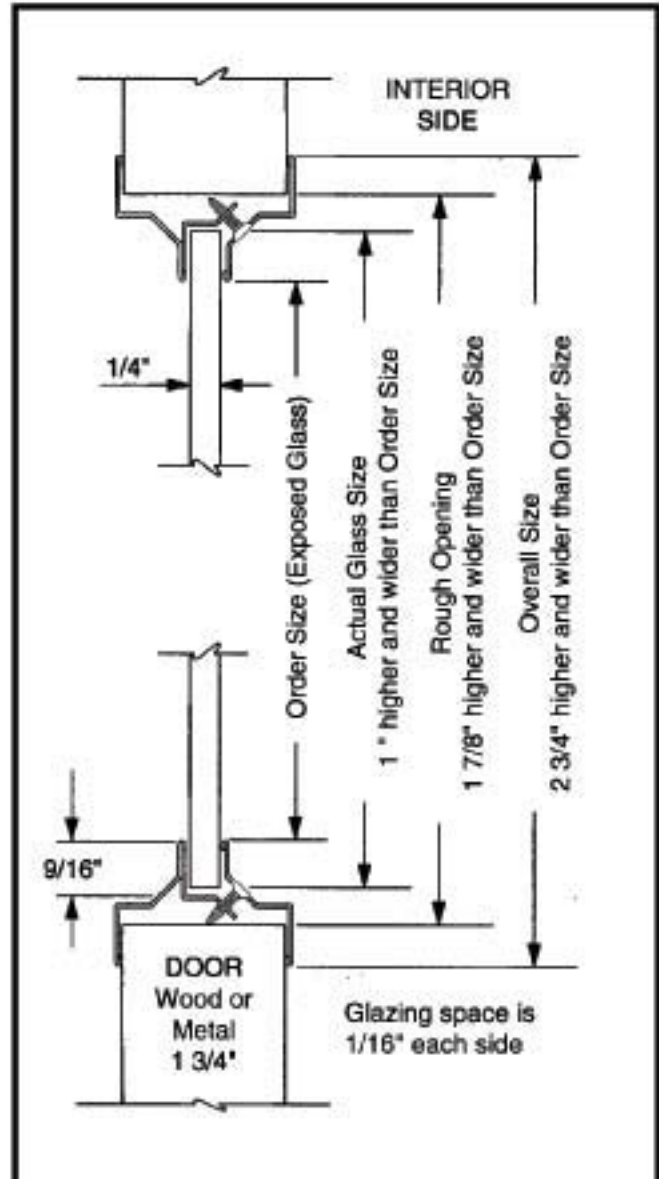

QUANTITY:	WIDTH x HEIGHT:
PROJECT:	LOCATION:
Advantage Lites & Louvers 415 Concord Avenue Bronx, NY 10455-1004 800-635-5335 or 718-585-3230 Fax: 800-851-0000 or 718-292-2243	ENGINEER:
	ARCHITECT:
	CONTRACTOR:
	SUBMITTED BY:
	DATE:

The policy of Advantage Lites & Louvers is one of continual improvement in design and manufacturing whenever possible to ensure still finer products. Therefore, specifications and product availability are subject to change without notice.