

Model Number

84G-Z
To order specify Z# - see types available

For Use With

1 3/4" Doors

Material

18 gauge cold rolled steel

Uses Glass Thickness

1/4"
Glass not included. Use labeled glass only in UL-listed installations

Screw/Bolt Arrangement

High-style frame design for thru-bolt application, or can be screwed from both sides.

Rough Opening

1 1/2" wider and higher than exposed glass

Actual Glass Size

1" wider and higher than exposed glass

Finish


Grey powder-coated. Other colors available upon request.

Other Information

Mullion bars welded into frame kit on both sides finished to match the lite kit.

UL Listed

Meets UL 10C positive pressure requirements when used in accordance with UL specifications.

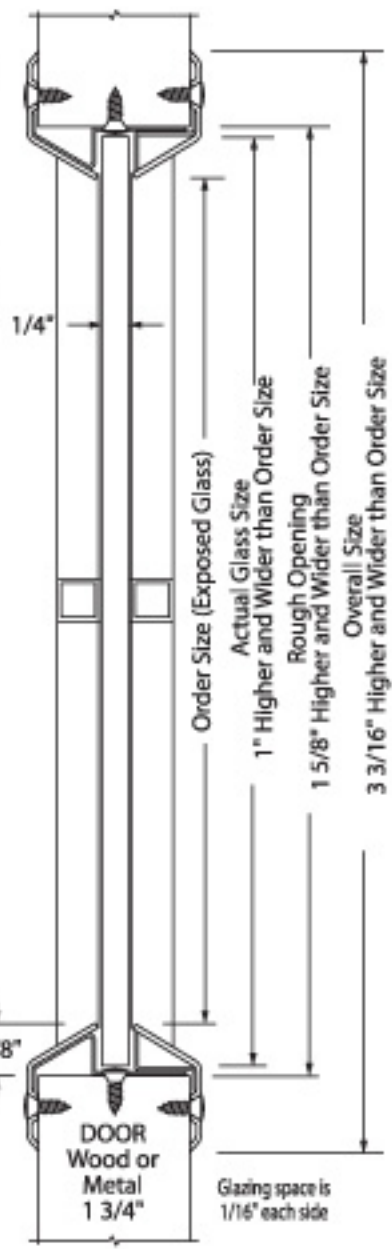

TYPES AVAILABLE

84G-Z2 (1 Bar)	84G-Z3 (2 Bars)	84G-Z10 (5 Bars)	84G-Z12 (5 Bars)
84G-Z4 (2 Bars)	84G-Z6 (3 Bars)	84G-Z15 (6 Bars)	84G-Z18 (7 Bars)
84G-Z8 (4 Bars)	84G-Z9 (4 Bars)	84G-Z21 (8 Bars)	84G-Z24 (9 Bars)

