

Model #


100AFL

Advantage Fusible-Link

90 Min. Fire rated



10C Classified

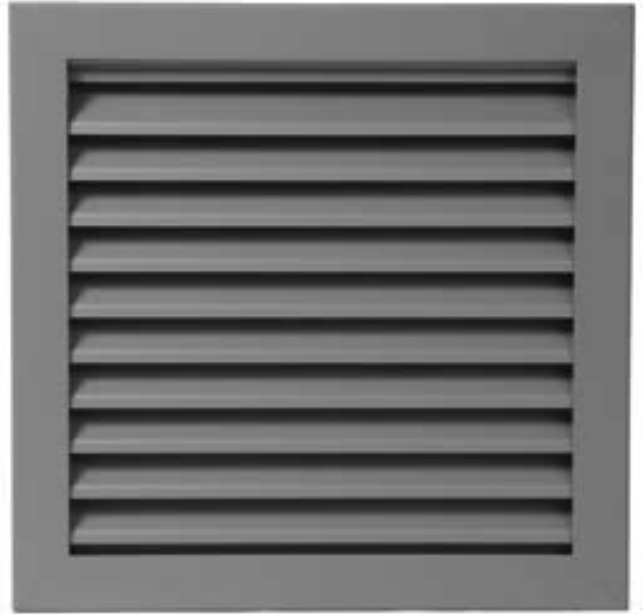

For Use With

1 3/4" Doors

Construction

16 Gauge Frame And Fusible Link Louver Blades

Blade Design

Louver blades are operated by a manual adjusting tab and pivot on cadmium-plated steel rivets.

Screw Arrangement

Frame attached with #6 x 5/16" Pan Phillips and #8x1" Oval Phillips Sheet Metal Screws.

Louver Free Area (as % of order size)

45%

Order Size

Rough opening size.

Rough Opening


Same as order size.

Finish

Bronze primed.

Options Available & Other Information

Factory-installed spring-loaded fusible link. Activated at 167°F (74°C). Suitable for cold climate.

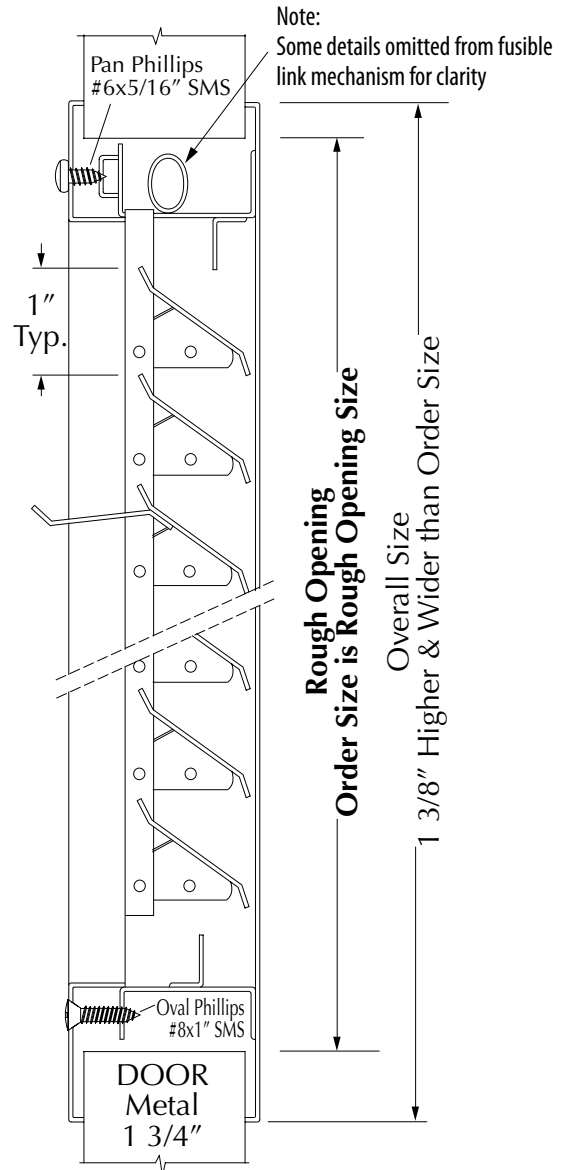

415 Concord Avenue, Bronx, NY 10455
Tel 718-585-3230 • Fax 718-292-2243
www.a-ll.com



A ZERO INTERNATIONAL COMPANY
www.zerointernational.com

Since 1923