

Model #

200AIL
200AIL-G (Galvanized)*



Advantage Intumescent Louver

90 Min. Fire rated

For Use With

1 3/4" & 1 3/8" Doors

Construction

Cold Rolled Steel
Frame: 20 Gauge
Blades: 20 Gauge

Blade Design

Vision-proof louver. Inverted "Y" design with concealed INTUMET™ fire seal.

Screw Arrangement

Pan Phillips #10 x 3/8" Sheet Metal Screw. Front frame attached to lower core with concealed screws.

Louver Free Area (as % of order size)

48%

Order Size

Nominal size.

Rough Opening

1/2" wider and higher than order size.


Finish

Standard colors : Grey, Bronze, Beige. Other colors available upon request. All louvers grey powder-coated primer unless specified other.


Options Available & Other Information

Intumescent expands at 550F° (288C°). Suitable for warm or cold climate.

* Galvanized product is recommended for exterior or high humidity application

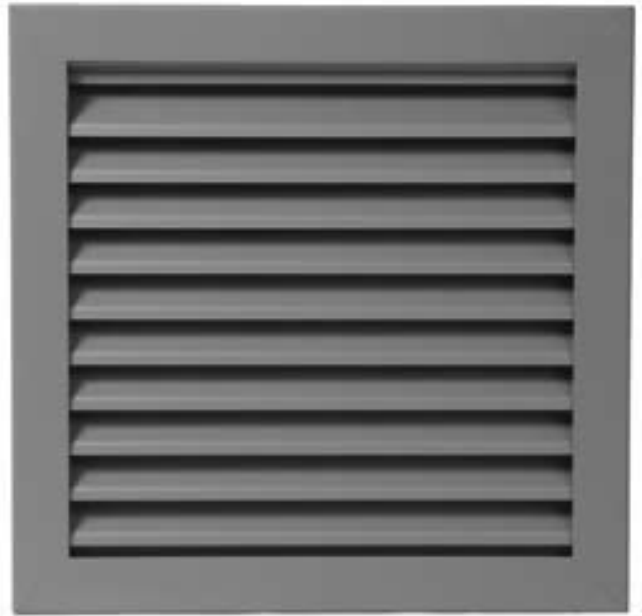

Patent# 20070251175

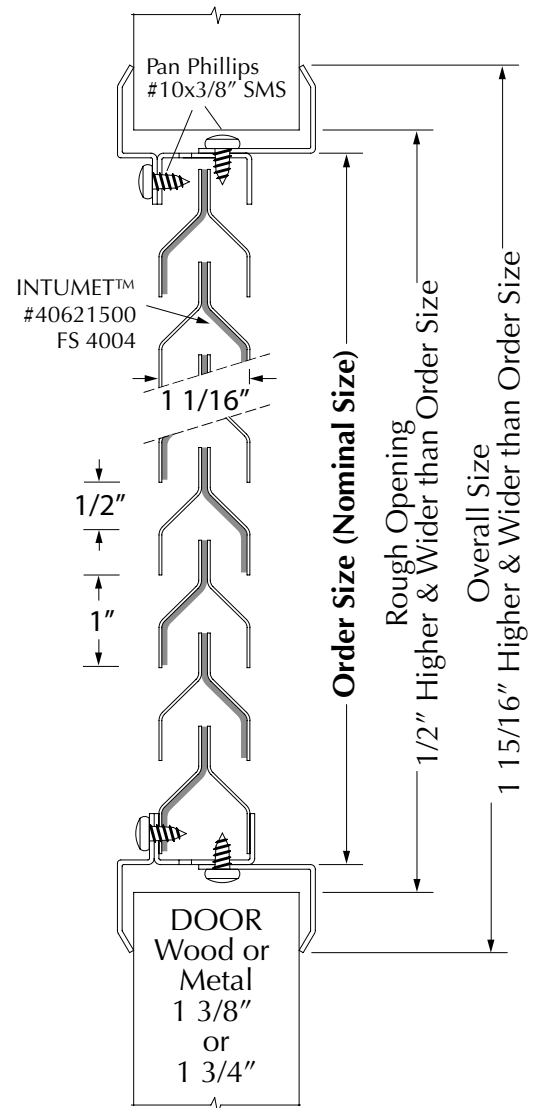

415 Concord Avenue, Bronx, NY 10455
Tel 718-585-3230 • Fax 718-292-2243
www.a-ll.com



A ZERO INTERNATIONAL COMPANY
www.zerointernational.com

Since 1923