

Model # 700AA

For Use With 1 3/4" & 1 3/8" Doors

Construction Extruded aluminum frame with mitered corners and prepunched mounting screw holes

Blade Design Individually extruded aluminum "V" blade horizontally set on 3/4" centers, fixed at 37° angle for vision-proof.

Screw Arrangement Frame attached with #6 x 3/4" Pan Phillips head self-attached screws.


Louver Free Area (as % of order size) 63%

Order Size Nominal size.

Rough Opening 1/2" wider and higher than order size.

Finish All louvers are supplied in a 204 R1 clear anodized finish. Powder coated available upon request.

Options Available & Other Information Factory-installed screen, trapped between louver core and louver back frame. To order specify "SCR".

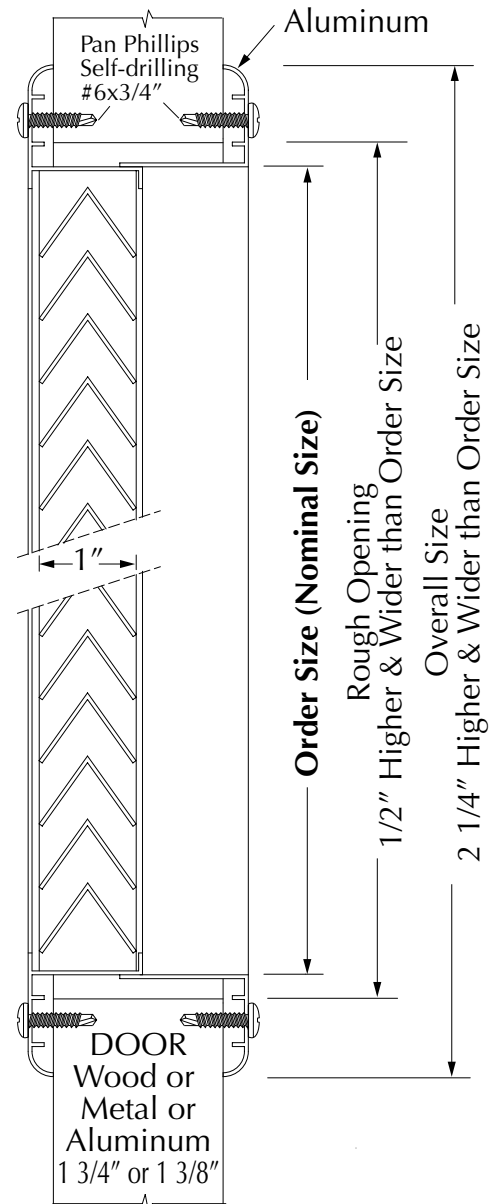

415 Concord Avenue, Bronx, NY 10455
Tel 718-585-3230 • Fax 718-292-2243
www.a-ll.com



A ZERO INTERNATIONAL COMPANY
www.zerointernational.com

Since 1923