

Model #**784G**
784G-G (Galvanized)***For Use With****1 3/4"** Doors**Construction**

18 Gauge Cold Rolled Steel

Uses Glass Thickness**1/4"***Glass sold separately.
Use labeled glass only in UL-listed installations.***Screw / Bolt Arrangement**Pan Phillips #8 x 1 1/4" Sheet Metal Screw.
No screws visible on exterior side.
Frame screws to itself.**Order Size**

Same as exposed glass.

Actual Glass Size

1" wider and higher than order size.

Rough Opening

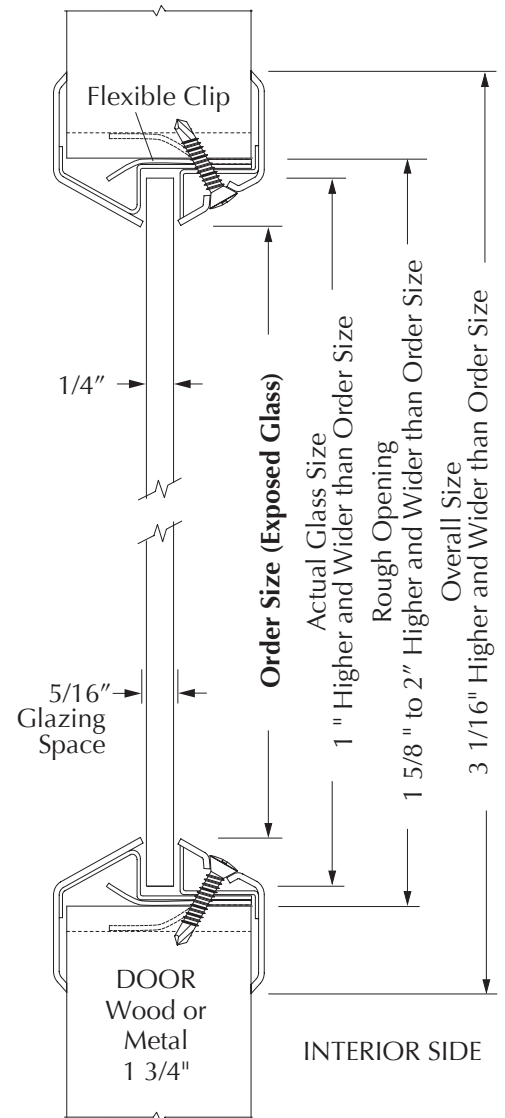
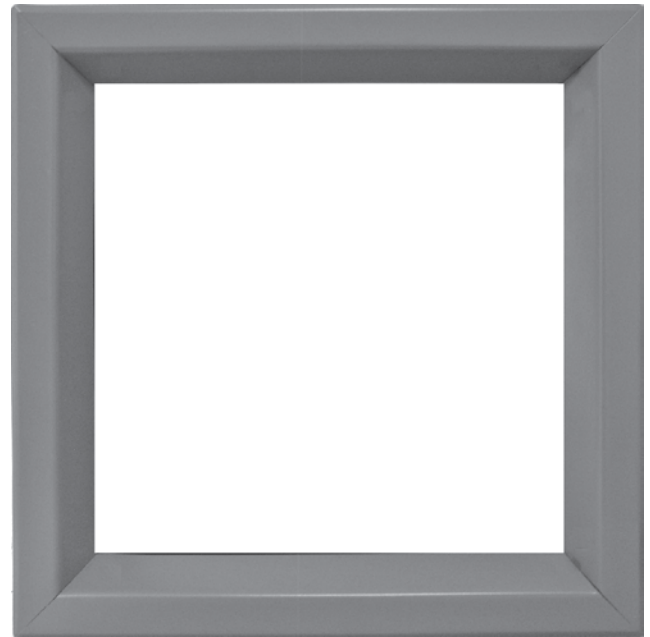
1 5/8" to 2" wider and higher than order size

FinishStandard colors : Grey, Bronze, Beige.
Other colors available upon request.
All vision lites grey powder-coated primer unless specified other.**Other Information**

Specify Kit # 115127 for use with classified wood fire doors.

UL Listed

Meets UL 10C positive-pressure requirements when used in accordance with UL specifications.

** Galvanized product is recommended for exterior or high humidity application.*A ZERO INTERNATIONAL COMPANY
www.zerointernational.com