

Model #

**8CY
G8Y** (Galvanized)*

For Use With

1 3/4" & 1 3/8" Doors

Construction

Cold Rolled Steel
Frame: 20 Gauge
Blades: 20 Gauge

Blade Design

Vision-proof louver.
Inverted "Y" design.

**Screw
Arrangement**

Pan Phillips #10 x 3/8" Sheet Metal Screw.
Front frame attached to lower core with
concealed screws.

**Louver Free Area
(as % of order size)**

43%

Order Size

Nominal size.

Rough Opening


1/2" wider and higher than order size.

Finish

Standard colors : Grey, Bronze, Beige.
Other colors available upon request.
All louvers grey powder-coated primer
unless specified other.

**Options Available
& Other Information**

Factory-installed screen, trapped between
louver core and louver back frame.
To order specify "SCR".

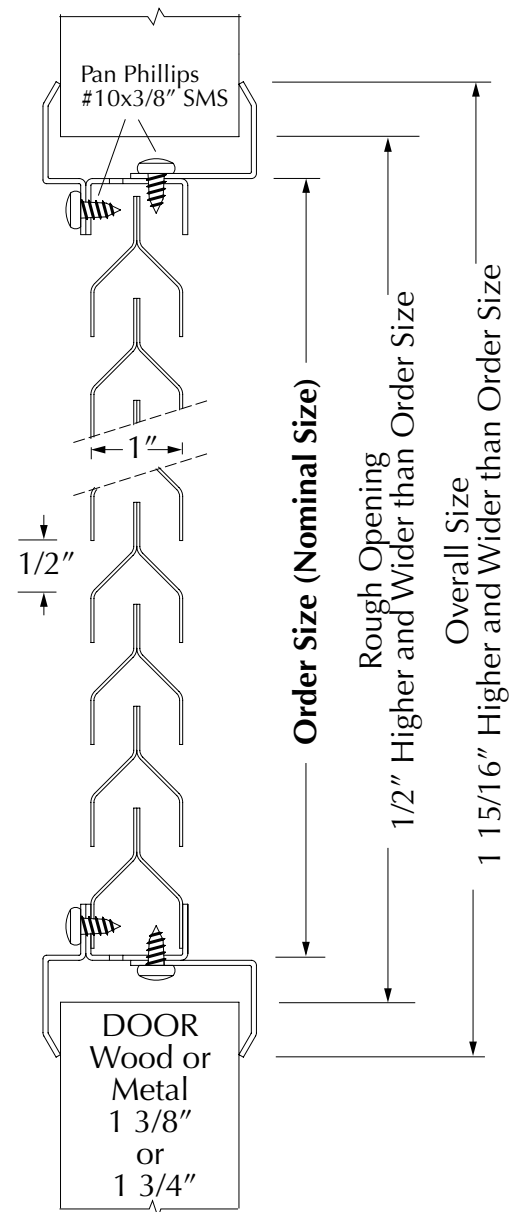

* Galvanized product is recommended for exterior or high humidity application.



415 Concord Avenue, Bronx, NY 10455
Tel 718-585-3230 • Fax 718-292-2243
www.a-ll.com



A ZERO INTERNATIONAL COMPANY
www.zerointernational.com

Since 1923