

**Model #**

**T4G**  
**T4G-G**



**For Use With**

**1 3/4" Doors**

**Construction**

20 Gauge Cold Rolled Steel

**Uses Glass Thickness**

**1/4"**  
*Glass sold separately.  
Use labeled glass only in UL-listed installations.*

**Screw / Bolt Arrangement**

Pan Phillips #6 x 3/4" Sheet Metal Screw.  
No screws visible on exterior side.  
Frame screws to itself.

**Order Size**

Same as exposed glass.

**Actual Glass Size**

1" wider and higher than order size.

**Rough Opening**

2" wider and higher than order size.

**Finish**



Standard colors : Grey, Bronze, Beige.  
Other colors available upon request.  
All vision lites grey powder-coated primer unless specified other.

**Other Information**

- Low profile
- No need to shim for panic device
- Slotted putty stop for easy alignment.  
Installation dip can be used anywhere along putty stop.

**UL Listed**

Meets UL 10C positive-pressure requirements when used in accordance with UL specifications.

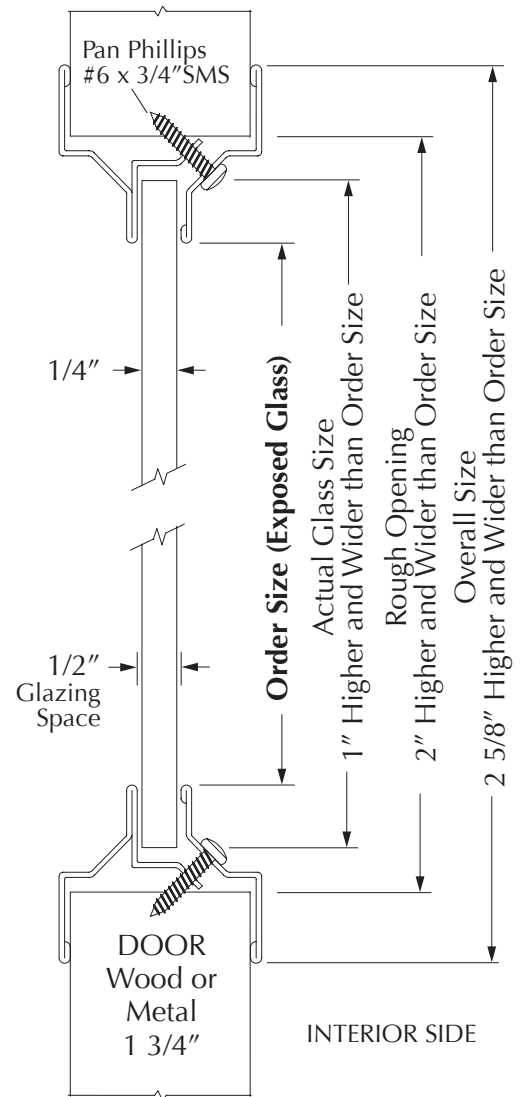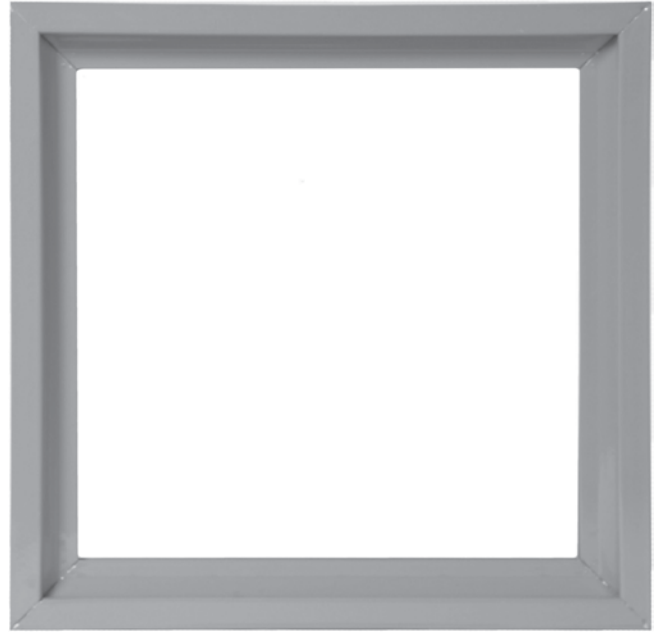

415 Concord Avenue, Bronx, NY 10455  
Tel 718-585-3230 • Fax 718-292-2243  
www.a-ll.com



A ZERO INTERNATIONAL COMPANY  
www.zerointernational.com

Since 1923