


Model #

XX88G
XX88G-G (Galvanized)*

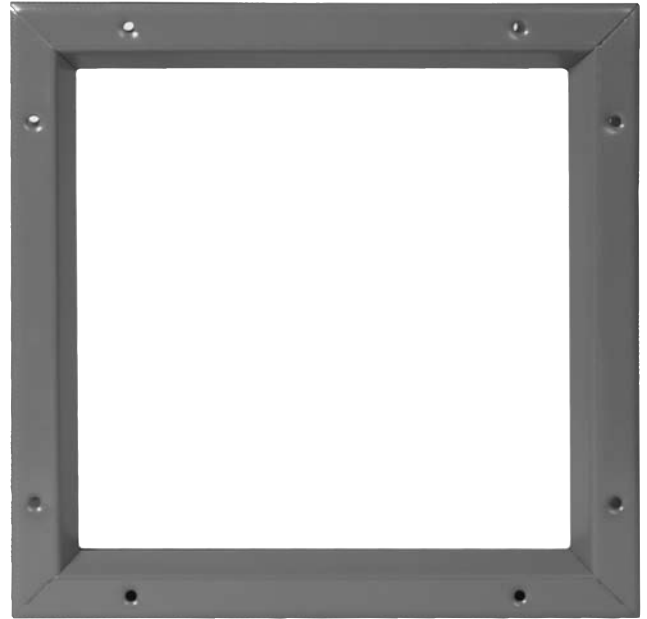

For Use With

1 3/4" Doors

Construction

18 Gauge Cold Rolled Steel

Uses Glass Thickness

5/8"
*Glass sold separately.
Use labeled glass only in UL-listed installations.*

Screw / Bolt Arrangement

High-style frame design for thru-bolt application or can be screwed from both sides with Oval Phillips #8x1/2" Sheet Metal Screw.

Order Size

Same as exposed glass.

Actual Glass Size

3/4" wider and higher than order size.

Rough Opening

1 1/4" wider and higher than order size.

Finish


Standard colors : Grey, Bronze, Beige.
Other colors available upon request.
All vision lites grey powder-coated primer unless specified other.

Other Information

Specify Kit # 115127 for use with classified wood fire doors.

UL Listed

Meets UL 10C positive-pressure requirements when used in accordance with UL specifications.

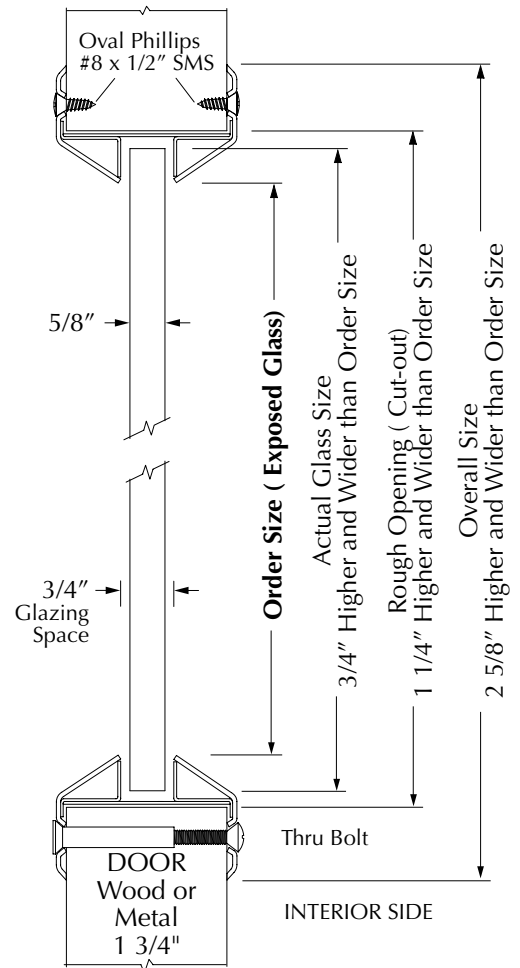

* Galvanized product is recommended for exterior or high humidity application.

