

SUBMITTAL SHEET

MODEL 100AFL

FUSIBLE-LINK DOOR LOUVERS



This Product is Listed by
UNDERWRITERS LABORATORIES, INC.
and Bears the Mark



- UL Listed for use in fire doors up to 1½ hour rating.
- Frame and fusible-link louver blades are made from 16 Gauge cold rolled steel.
- Frame attached with #6 Phillips head screws, furnished.
- Fusible-link louver blades are operated by a manual adjusting tab and pivot on cadmium plated steel rivets.
- Factory installed, spring loaded fusible link. Upon actuation of the link the action bar rotates and locks the louver blades in closed position.

Available Order Sizes
W x H

12" x 12"
18" x 12"
18" x 18"
18" x 24"
24" x 12"
24" x 24"


No other sizes available.

ORDERING:

1. Order size is rough opening size.
2. Order by width (first) x height (last).
3. Custom sizes are not available.

FINISH:

Grey powder-coated primer.

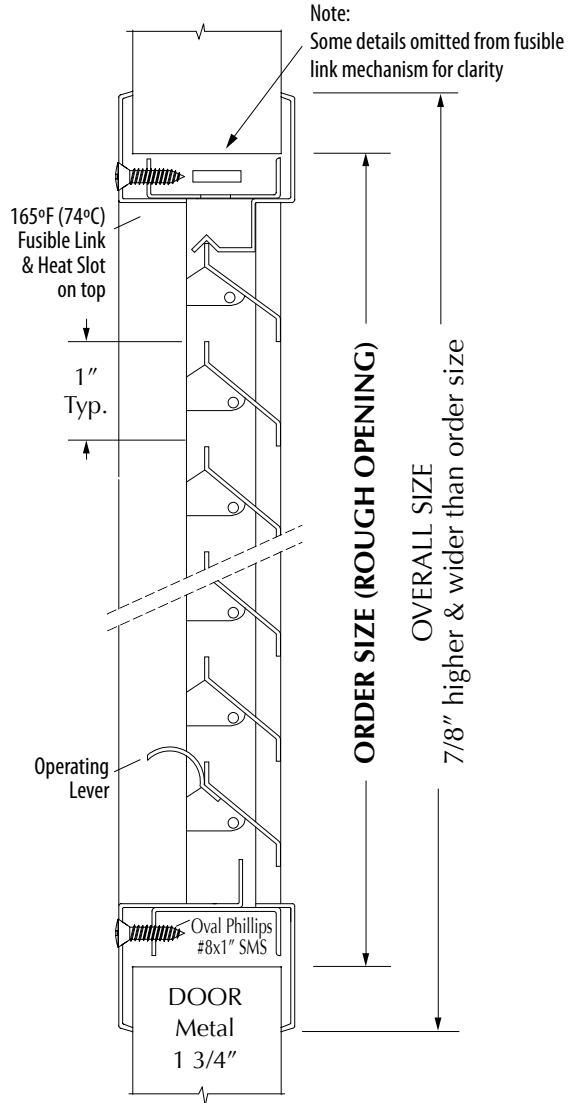

QUANTITY:		WIDTH x HEIGHT:	
PROJECT:			
LOCATION:			
ADVANTAGE LITES & LOUVERS 415 Concord Avenue Bronx, NY 10455-1004 T 800-635-5335 718-585-3230 F 800-851-0000 718-292-2243	ENGINEER:		
	ARCHITECT:		
	CONTRACTOR:		
	SUBMITTED BY:		DATE:

The policy of Advantage Lites and Louvers is one of continual improvement in design and manufacturing whenever possible to ensure finer products. Therefore, specifications and product availability are subject to change without notice.