

# SUBMITTAL SHEET

# MODEL 40Y

## FREE FLOW DOOR LOUVERS



- For use with any wall or door thickness.
- Supplied without frame. User supplies molding.
- Vision proof inverted “Y” design 24 Gauge cold rolled galvanized steel louver blades. 20 Gauge “U” channel surround.
- Aluminum insect screen is available as a factory installed option. Screen is trapped between the louver core and the louver back frame.
- Rough opening size is 1/8” wider and higher than order size.
- Louver free area is approximately 43% of the order size.
- Minimum order size: 6” x 6”
- Maximum order size: 40” x 84”
- For sizes larger than listed, contact factory.

### ORDERING:


1. Order size is core (nominal) size.
2. Door louvers can be supplied in any specified size that does not exceed the minimum and maximum dimensions. However, best service and price is available in two inch even increments.
3. Fractional sizes and odd sizes are available within minimum and maximum dimensions.

### SCREEN:

Yes (To order specify “SCR”)       No

### FINISH:

Grey                                       Bronze  
 Beige                                       White

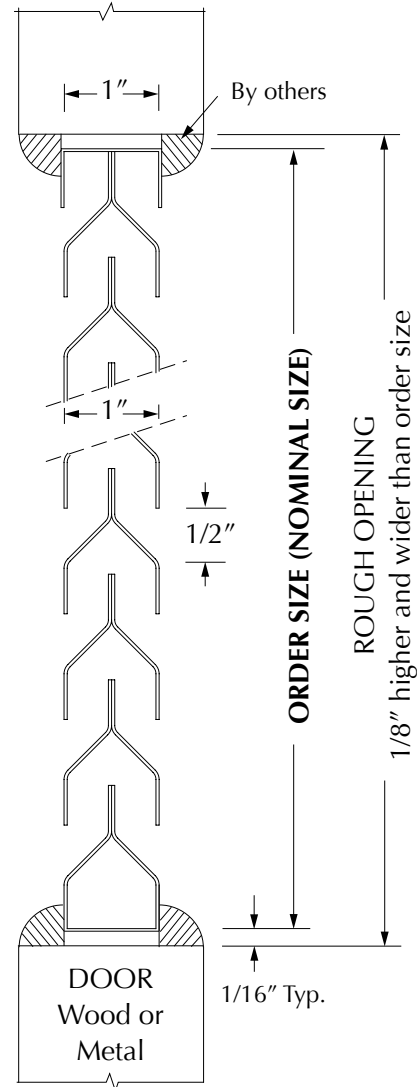

TYPICAL USER INSTALLATION.  
 Core installed in 1 3/4” wooden door using 3/8” quarter-round.

QUANTITY:		WIDTH x HEIGHT:	
PROJECT:			
LOCATION:			
<b>ADVANTAGE LITES &amp; LOUVERS</b> 415 Concord Avenue Bronx, NY 10455-1004 T 800-635-5335   718-585-3230 F 800-851-0000   718-292-2243	ENGINEER:		
	ARCHITECT:		
	CONTRACTOR:		
	SUBMITTED BY:		DATE:

*The policy of Advantage Lites and Louvers is one of continual improvement in design and manufacturing whenever possible to ensure finer products. Therefore, specifications and product availability are subject to change without notice.*