


# SUBMITTAL SHEET

# MODEL 4CY

## FREE FLOW DOOR LOUVERS



- For use with 1 3/4" OR 1 3/8" wood, metal or plastic solid core or hollow doors.
- The front frame is screw attached to the louver core with concealed screws.
- Louver kit uses size #10 Phillips head screw.
- Vision proof louver blades are 24 Gauge, frame is 20 Gauge cold rolled galvanized steel.
- Aluminum insect screen is available as a factory installed option. Screen is trapped between the louver core and the louver back frame.
- Rough opening size is 1/2" wider and higher than order size.
- Core available separately for alternate installations. (See model 40Y)
- Louver free area is approximately 43% of the order size.
- Minimum order size: 6" x 6"
- Maximum order size: 40" x 96"
- For sizes larger than listed, contact factory.

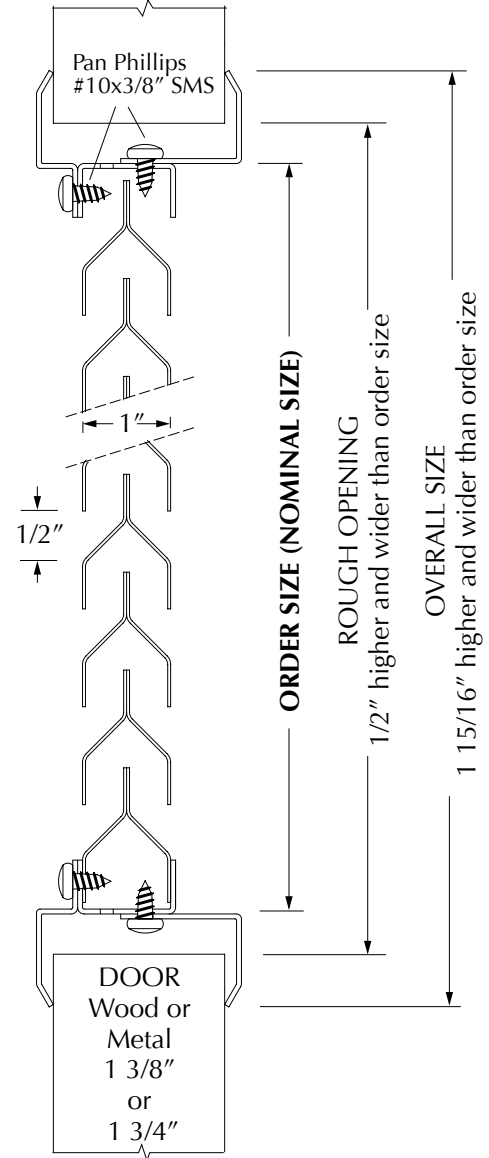

### ORDERING:

1. Order size is core (nominal) size.
2. Door louvers can be supplied in any specified size that does not exceed the minimum and maximum dimensions. However, best service and price is available in two inch even increments.
3. Fractional sizes and odd sizes are available within minimum and maximum dimensions.

### SCREEN:

Yes (To order specify "SCR")       No

### FINISH:

Grey       Bronze  
 Beige

QUANTITY:		WIDTH x HEIGHT:	
PROJECT:			
LOCATION:			
<b>ADVANTAGE LITES &amp; LOUVERS</b> 415 Concord Avenue Bronx, NY 10455-1004 T 800-635-5335   718-585-3230 F 800-851-0000   718-292-2243	ENGINEER:		
	ARCHITECT:		
	CONTRACTOR:		
	SUBMITTED BY:		DATE:

*The policy of Advantage Lites and Louvers is one of continual improvement in design and manufacturing whenever possible to ensure finer products. Therefore, specifications and product availability are subject to change without notice.*