

**Model #**

**Polished Wired Glass\*\***

**Glass with Embedded Wire Mesh**

**45/60/90 Minute Fire Protective Glazing**

**For Use With**

Advantage models # T4G, T4G-G, 784G, 84G-Z#, or any approved fire-rated framing system.

**Specifications**

Thickness : 1/4"(7mm)  
Weight: 3.8 lbs./ sq. ft.  
Appearance : Wired

**Other Information**

Fire resistant, positive-pressure fire-rated.

**UL Listed**

**Fire-Rating Information:**

UL 9, UL 10B

45 minutes : For doors, windows, door frames, 1,296 sq. in. max. lite area (up to 54" W x 54" H), min. depth 3/4".

90 minutes : For doors, 100 sq. in. max. lite area (up to 12" W x 33" H), min. depth 1/2".

UL 10C, UBC 7-2 (1997), UBC 7-4 (1997)

45 minutes : For metal doors, 2,856 sq. in. max. lite area (up to 34" W x 84" H), min. depth 5/8".

For windows and sidelites, 4,608 sq. in. max. lite area (up to 48" W x 96" H), min. depth 5/8".


For transoms, 3,456 sq. in. max. lite area (up to 96"W x 36" H), min. depth 5/8".

For doors, windows, door frames, 1,296 sq. in. max. lite area (up to 54" W x 54" H), min. depth 3/4".


60 minutes : For wood doors, 960 sq. in. max. lite area (up to 12" W x 80" H), min. depth 5/8".

90 minutes : For metal doors 552 sq. in. max. lite area (up to 12" W x 46" H), min. depth 5/8".

For doors, 100 sq. in. max. lite area (up to 12" W x 33" H), min. depth 1/2".

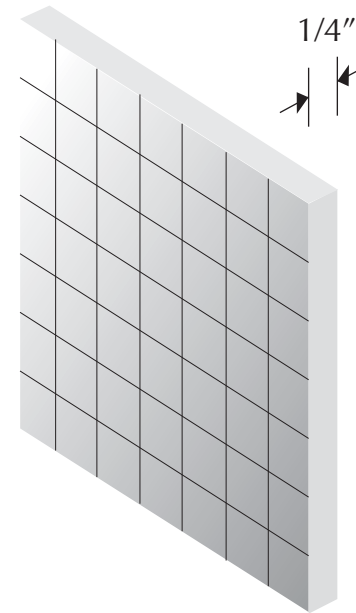

● Cross Mesh

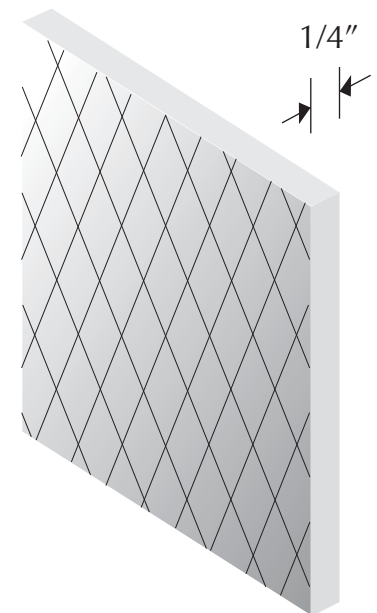

● Diamond Mesh



**ADVANTAGE**  
LITES & LOUVERS  
ADVANTAGE LITES & LOUVERS, INC.  
415 Concord Avenue, Bronx, NY 10455 U.S.A  
Tel: 718-585-3230 Fax:718-292-2243 Web: www.a-ll.com



A ZERO INTERNATIONAL COMPANY  
www.zerointernational.com  
Since 1923

\*\* May be restricted by local codes that require safety-rated wire glass.