

# SUBMITTAL SHEET

# MODEL 700AA

## FREE FLOW DOOR LOUVERS



- For use in 1 3/4" OR 1 3/8" wood, metal or aluminum doors.
- For interior and exterior use.
- Extruded aluminum frame with mitered/ welded corners and pre-punched mounting screw holes
- Louver kit uses size #6 Phillips head self-drilling screw.
- Individually extruded aluminum "V" blade horizontally set on 3/4" centers, fixed at 37° angle for vision-proof.
- Louver free area is approximately 63% of the order size.

### ORDERING:

1. Order size is core (nominal) size.
2. Order by width (first) x height (last)


### FINISH:

Supplied in 204R1 clear anodized.  
Powder coated available upon request.

#### Available Order Sizes

W x H
8" x 8"
10" x 4"
12" x 8"
12" x 12"
12" x 18"
14" x 8"
14" x 12"
16" x 8"
16" x 16"
18" x 12"
18" x 18"
18" x 24"
20" x 10"
20" x 12"
20" x 14"
20" x 16"
20" x 20"
24" x 12"
24" x 16"
24" x 18"
24" x 24"

Other sizes available upon request.

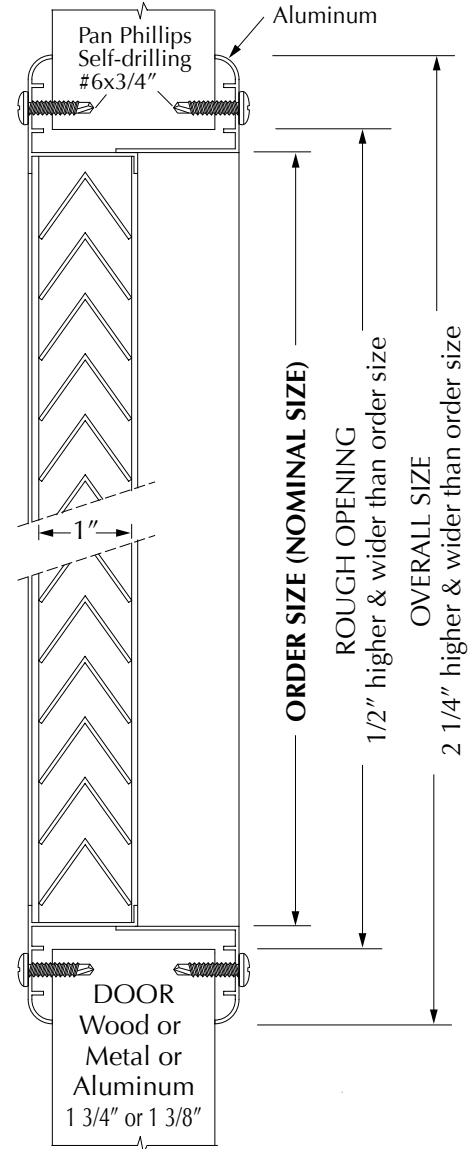

QUANTITY:		WIDTH x HEIGHT:	
PROJECT:			
LOCATION:			
<b>ADVANTAGE LITES &amp; LOUVERS</b> 415 Concord Avenue Bronx, NY 10455-1004 T 800-635-5335   718-585-3230 F 800-851-0000   718-292-2243	ENGINEER:		
	ARCHITECT:		
	CONTRACTOR:		
	SUBMITTED BY:		DATE:

The policy of Advantage Lites and Louvers is one of continual improvement in design and manufacturing whenever possible to ensure finer products. Therefore, specifications and product availability are subject to change without notice.